


JTS-315S

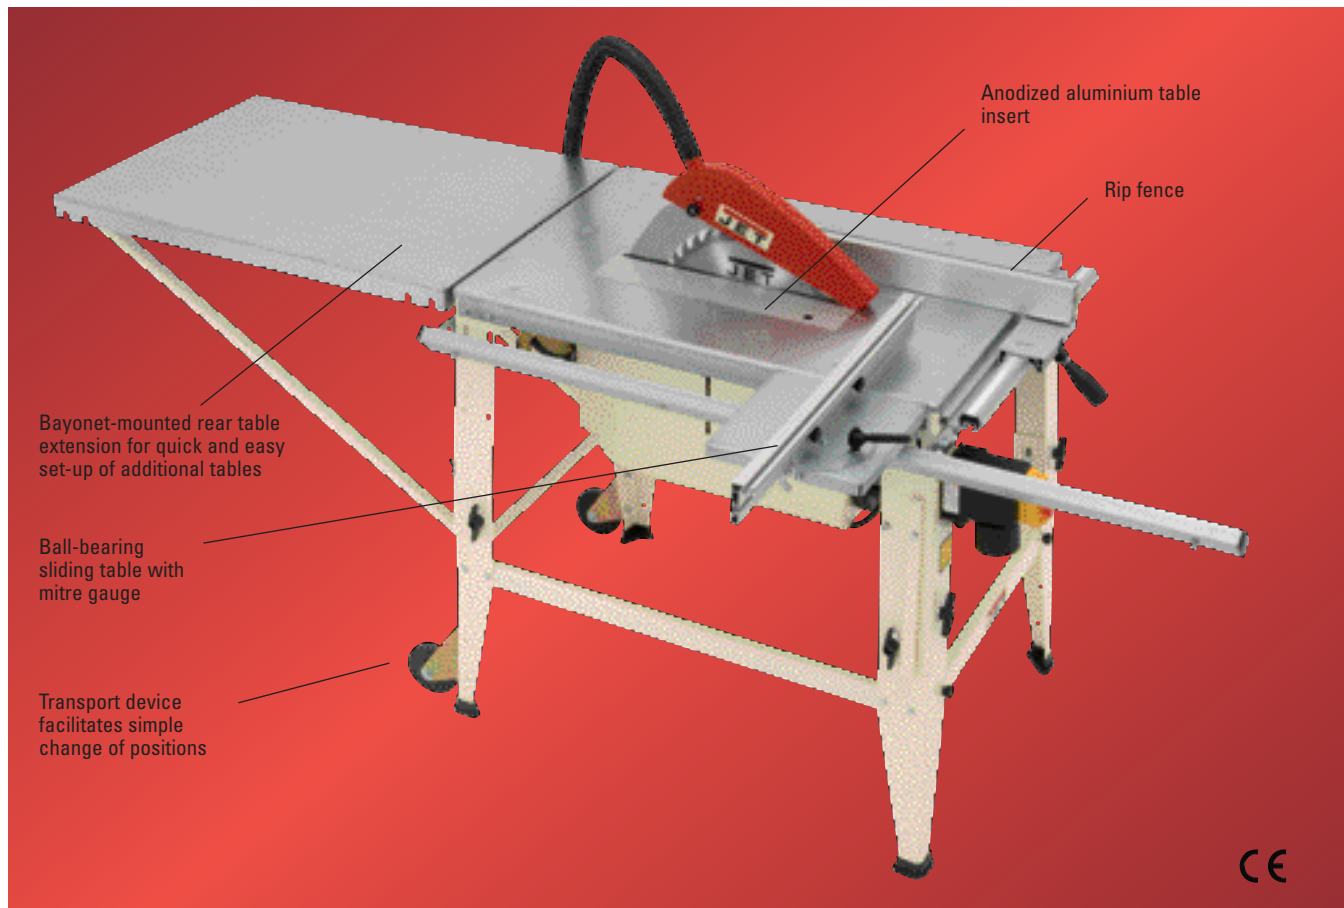

JTS-315S – CONSTRUCTION SAW

- ◆ Foldable legs and bayonet mounted rear table extension facilitate quick machine start-up
- ◆ Galvanized steel machine table withstands corrosion and wear
- ◆ Convenient blade tilt up to 47° via hand wheel, adjustable stop at 0°
- ◆ Powerful motor with brake, suitable for continuous operation
- ◆ 100 mm dust port and dust collection on top for optimum working conditions
- ◆ Supplied as standard with a 36T blade
- ◆ Sliding table with 600 mm crosscut and right table extension also facilitate cutting of large panels
- ◆ Wheels supplied as standard for ease of positioning
- ◆ Anodised aluminium table insert
- ◆ Longitudinal fence with eccentric clamping
- ◆ Lockable switch to avoid unauthorized operation
- ◆ Transport device
- ◆ Operating tools
- ◆ Operating instructions

Standard equipment


- ◆ 36-tooth carbide tip saw blade
- ◆ Rear table extension 550 x 800 mm
- ◆ Sliding table
- ◆ Top dust port

Stock number 230V	10000810SM
Stock number 400V	10000810ST
Model	JTS-315S
Table size	550 x 800 (1600) mm
Max. depth of cut with 90°/45°	90 / 60 mm
Saw blade diameter/bore	315 / 30 mm
Speed	2800 rpm
Motor: 230 V power output	2.2 HP / S ₁ 100%
Motor: 230 V power input	3.0 HP / S ₆ 40%
Motor: 400 V power output	2.8 HP / S ₁ 100%
Motor: 400 V power input	4.2 HP / S ₆ 40%
Blade tilt range	0–47°
Dust port connection	100 mm
Width of cut	310 (860) mm
Max. length of cut	600 mm
Weight	50 kg

Accessories



- ◆ 10000817
Precision sliding
table 250 x 230 mm



- ◆ 10000811
Right extension
wing 550 x 800 mm



- ◆ 10000245
Carbide tip saw blade
Ø 315/30-Z48