

# ORWAK 3605

This large and powerful baler is perfect for operations with really large amounts of packaging! Orwak 3605 offers a quick, safe and profitable way to handle the material and with a press force of 50 ton it generates high-density bales.

**LARGE  
VOLUME**

---

## **MORE PRODUCTIVE USE OF TIME**

Less time spent on waste handling, more time devoted to your core activities.

---

## **VOLUME REDUCTION**

More compaction = less waste volume to transport for recycling or disposal. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions.

---

## **MORE SPACE**

Our baler rapidly minimizes the space the waste takes up, keeping aisles and passageways free and tidy.



# ORWAK 3605

## High capacity baler for large volumes of waste




Press force 50 ton

Switch between HP and LP

Sliding door with autostart function

Safe door opening

Standard bale dimensions for optimal transport logistics  
Maximum pay load per truck and reduced CO<sup>2</sup>-emission

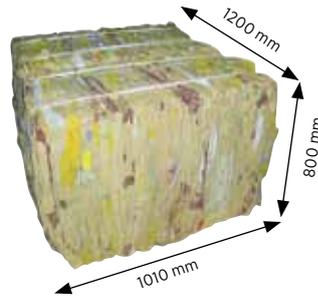

### ORWAK 3605 IS OPTIMIZED FOR:

#### PAPER

- + Cardboard
- + Shredded
- + Paper sacks

#### PLASTIC FOIL

- + Shrink film (LP)
- + Plastic bags (LP)

### SLIDING DOOR AND AUTOSTART FOR FAST AND CONVENIENT COMPACTION

For fast and convenient loading Orwak 3605 has a sliding door that opens automatically after each cycle. An autostart function allows the baler to start compacting the material as soon as the door closes.

### SILENT OPERATION CONTRIBUTES TO A BETTER WORKING ENVIRONMENT

Due to a silent type of hydraulics, the sound emission is low, which contributes to improving the working environment for the employees and is an important feature if the baler is installed close to customers.

### SAFE DOOR-OPENING


"The latch and wheel" locking system on the lower door allows the operator to gradually open the door in a controlled way even when compacting expanding materials.

### SHORT CYCLE TIME

Orwak 3605 is fast with a cycle time of only 33 seconds.

## DIMENSIONS AND SPECIFICATIONS

Dimensions					
A	B	C	D	E	F*
3436 mm	1770 mm	1285 mm	2645 mm	1133 mm	2260 mm

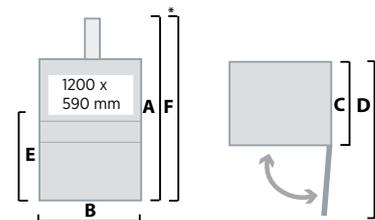

WEIGHT (MACHINE) TOTAL: 2140 KG

\*Transport Height

Technical specifications							
LOADING APERTURE	CYCLE TIME	PRESS FORCE	BALE SIZE	BALE WEIGHT	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
Width: 1200 mm Height: 590 mm	33 secs	50 ton, 500 kN	Width: 1200 mm Depth: 800 mm Height: 1010 mm	Cardboard: Up to 450 kg	63.9 db (A)	IP 55	3-phase 3x400 V, 50 Hz



#### TOMRA Compaction AB

Box 58, SE-576 22 Sävsjö, Sweden  
Tel: +46 382-157 00  
Fax: +46 382-106 07  
E-mail: info.compaction@tomra.com  
[www.tomracompaction.com](http://www.tomracompaction.com)

*We reserve the right to make changes to specifications without prior notice.  
Bale/bag/bin weights are dependent upon material type.*